



PARAMETER

MODELS

902306120, ARMOR 1200i	Automatic, High Force, 220/380V, 50/60Hz, 3 Phase
902306048, ARMOR 48i	
902307120, ARMOR 1200	Manual, High Force, 220/380V, 50/60Hz, 3 Phase
902307048, ARMOR 48	

CAPACITY

Welding Range	630mm-1200mm, 24" IPS - 48" IPS
Inserts Type	Multi aluminum inserts

POWER





Heater	24 kW
Trimmer	4 kW
Hydraulic Motor	11 kW

HYDRAULIC

System Pressure	180 Bar (2610 PSI) Max.
Hydraulic Reservoir Capacity	95 Liters (25 Gallons)

CHASSIS

Frame	Welded steel tube construction
Front Axle	Articulating
Tires	High-flotation inflatable tires
Transportation	Pulled via towing ring
Machine Carriage	Removable

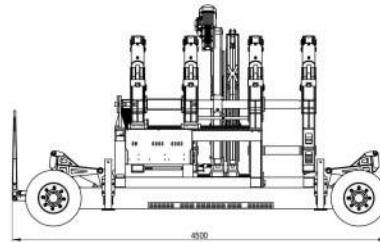

WEIGHT

Machine	9350 Kg (20570 lbs.), including inserts
Shipping	9350 Kg (20570 lbs.), including inserts

DIMENSION

Machine	4500mm x 2770mm x 2650mm 177" x 109" x 104"
Machine Carriage	2567mm x 2770mm x 2190mm 101" x 109" x 86"
Shipping	4500mm x 2770mm x 2650mm 177" x 109" x 104"

OPTIONAL CONFIGURATION

Inserts	
Stub End Device	
Mobile Support Roller	
Data Logger	Compatible with manual version